

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)


PCT

(10) International Publication Number
WO 2005/059357 A1

- (51) International Patent Classification⁷: F03B 17/04 (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/FI2004/000769
- (22) International Filing Date: 16 December 2004 (16.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20031842 16 December 2003 (16.12.2003) FI (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and
(72) Inventor: KORHONEN, Jaakko, Juhani [FI/FI]; Solvikinkatu 5 B 20, FI-00990 Helsinki (FI).
- (74) Agent: LAITINEN, Pauli, S.; Patentti-Laitinen OY, P.O. Box 29, FI-02771 Espoo (FI).

[Continued on next page]

(54) Title: DEVICE FOR PRODUCING ENERGY

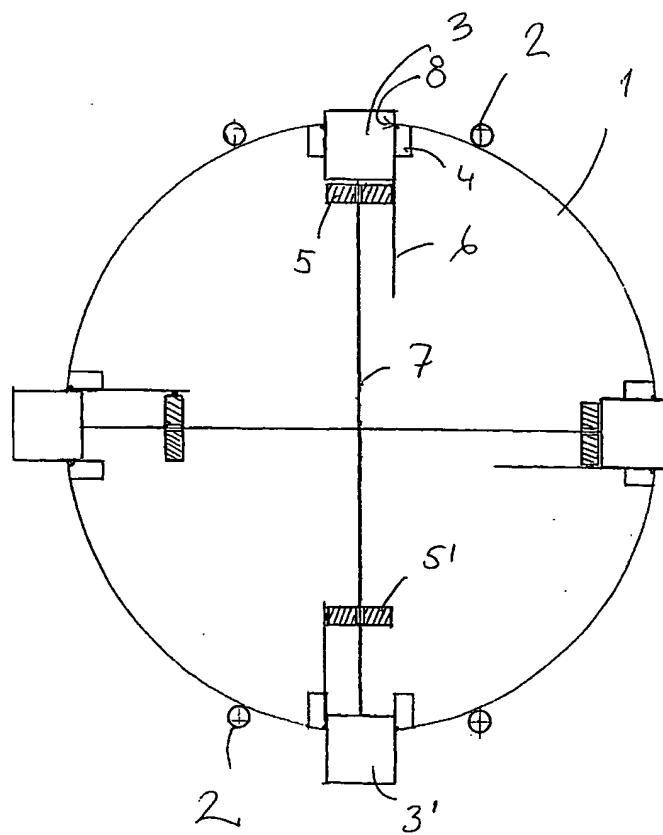

(57) Abstract: A device for producing energy, using a reservoir (1) filled with liquid or submerged in liquid and at least two moving pistons (3, 3'), which are tightly installed in guides (4) in wall of the reservoir. There are at least two pairs of pistons and in the immediate vicinity of each piston (3) there is a weight (5) that can be moved essentially in the radial direction of the reservoir (1).

O 2005/059357 A1



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.